

Powermax30® AIR

Professional-grade plasma system with internal air compressor for high portability and easy metal cutting



| Capacity | Thickness | Cut speed |
|-------------|-----------|-----------|
| | Cutting | |
| Recommended | 5/16" | 20 ipm |
| | 3/8" | 10 ipm |
| Severance | 5/8" | 5 ipm |



Easy-to-setup and operate

- Operate it anywhere with the internal air compressor.
- Plug into any 120 or 240 V power with Auto-Voltage™ technology and included plug adapters.
- Highly portable. The smallest, lightest weight system in its class.


Finish jobs faster

- Do more in less time. Fast cutting speeds and superior cut quality result in less secondary operations.
- Quickly cut metal grate or rusted metal without retriggering with the continuous pilot arc feature.
- One tool to cut a variety of metal types and thicknesses.

Rugged and reliable

- New AIR T30 torch is rugged and designed to withstand the toughest environments.
- Robust internal air compressor eliminates the costs associated with an external compressor.
- Hypertherm Certified™ reliability ensures performance in the most demanding environments.

Relative cut performance on mild steel

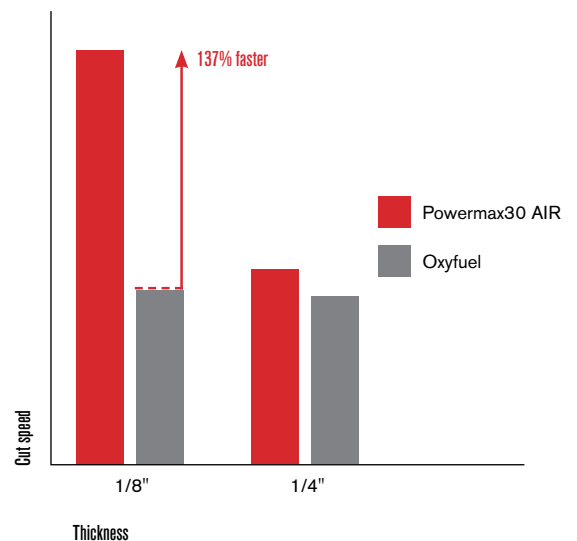

System includes

- Power supply, AIR T30 hand torch with 15' lead and work clamp with 15' lead
- 240 V/20 A plug with adapters for 120 V/15 A and 240 V/20 A circuits
- Operator and safety manuals
- 1 nozzle and 1 electrode
- Carrying strap

Ordering information

| Power supply | System part number with 15' AIR T30 torch |
|--------------|---|
| 120-240 V | 088096 |

Torch consumable parts

| Consumable type | Torch type | Amperage | Shield/Deflector | Retaining cap | Nozzle | Swirl ring | Electrode |
|-----------------|------------|----------|------------------|---------------|--------|------------|-----------|
| Standard | Hand | 30 | 420399 | 420135 | 420134 | 420133 | 420132 |

Electrodes and nozzles are sold in packs of five, as well as combination packs of 2 electrodes and 2 nozzles (part number 428350)



High performing technology

The new patent-pending consumable designs enable consistent cutting by optimizing the air flow from the compact, internal compressor. Coupled with the highly effective moisture removal system, the Powermax30 AIR provides great cut quality and performance in hot and humid conditions.

Customer testimonial

“Because our company provides service in very remote places where the access for air compressors is very limited, the portability of the Powermax30 AIR with the internal compressor, makes it ideal for field services. It also eliminates the need for oxyfuel cutting, consequently reducing the cost and increasing the productivity of the cutting process.”

Diego Nunes Fernando, BNG Metalmecânica, Brazil



Specifications

| | |
|----------------------------|---|
| Input voltages | 120-240 V, 1-PH, 50/60 Hz |
| Input current @ 2.5 kW | 120-240 V, 1-PH, 29-15 A |
| Output current | 15-30 A |
| Rated output voltage | 83 VDC |
| Duty cycle @ 104° F | 35%, 240 V 20%, 120 V |
| Open circuit voltage (OCV) | 256 VDC |
| Dimensions with handles | 16.5" D; 7.7" W; 13.1" H |
| Weight w/15' torch | 29.8 lbs |
| Input power cable length | 10' |
| Power supply type | Inverter - IGBT |
| Engine drive requirement | 5.5 kW for full 30 A output |
| Certifications | CSA-certified for use in the Americas and Asia, except China. |
| Warranty | Power supply: 3-year Torch: 1-year |

Cutting with 120 V input power


At the maximum recommended output of 20 A, the cut capacities are:

- 10 gauge at 30 ipm
- 1/4" at 14 ipm
- 3/8" at 5 ipm

Superior performance with high portability


Compared to competitive models with internal compressors, the Powermax30 AIR has the highest power-to-weight ratio which means it has the most cutting power in the lightest weight design.

Amps/weight

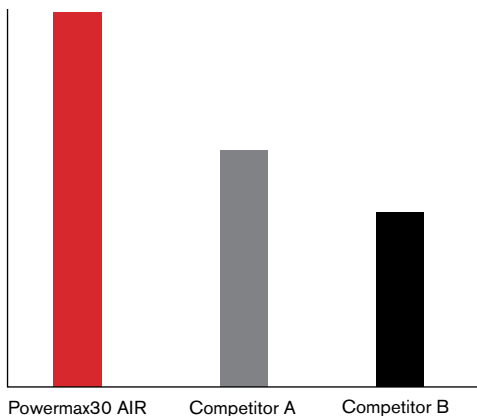

Common applications

HVAC, property/plant maintenance, fire and rescue, general fabrication, plus:

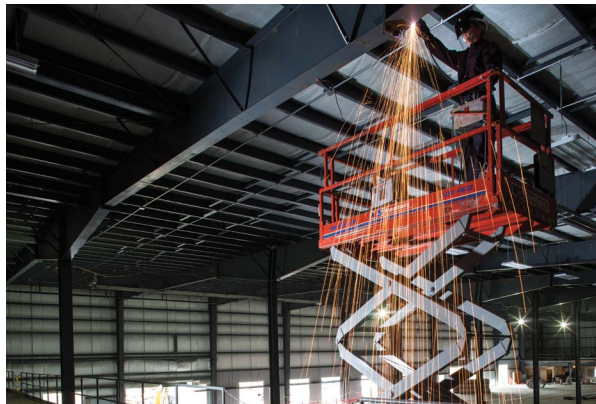

Construction



Vehicle repair and modification



Agricultural

Recommended Hypertherm genuine accessories



Face shield

Clear face shield with flip-up shade for cutting and grinding. Safety shield included. ANSI Z87.1, CSA Z94.3, CE.

127239 Face shield shade 6
127103 Face shield shade 8



Flip-up eyeshades

Shade 5 (for <40 A) flip-up shade, anti-scratch lens and adjustable frame. ANSI Z87.1, CSA Z94.3, CE.

017033 Flip-up eyeshades



Hyamp™ cutting and gouging gloves

Insulated for heavy duty applications. Gun-cut palm design with seamless trigger finger and extended cuff provide flexibility and protection.

017025 Medium
017026 Large
017027 X-large
017028 2X-large



Circle cutting guides

Quick and easy set up for accurate circles up to 28" diameter. For optional use as a stand-off guide for straight and bevel cuts. Made in USA.

127102 Basic kit—15" arm, wheels and pivot pin
027668 Deluxe kit—11" arm, wheels, pivot pin, anchor base and plastic case



System dust covers

Made from a flame-retardant vinyl, a dust cover will protect your Powermax® system for years. Made in USA.

127469 Cover, Powermax30 AIR



Pocket level and tape holder

Magnetic base and tape holder with built-in level. Made in USA.

017044 Pocket level and tape holder

For more information, visit: www.hypertherm.com

Hypertherm, Powermax, Auto-Voltage, Hypertherm Certified, and Hyamp are trademarks of Hypertherm, Inc. and may be registered in the United States and/or other countries. All other trademarks are the property of their respective owners.

Please visit www.hypertherm.com/patents for more details about Hypertherm Associates patent numbers and types.

© 8/2022 Hypertherm, Inc. Revision 2
860620



As 100% Associate owners, we are all focused on delivering a superior customer experience. www.hyperthermassociates.com/ownership

Environmental stewardship is one of Hypertherm Associates' core values. www.hyperthermassociates.com/environment

100% Associate-owned

