

Hassle free removal of Mill Scale

NEW

“Only the best”



FLEXCUT MILL SCALE™

Premium performance flexible grinding wheel for mill scale

- ✓ Ultra quick cutting action without glazing or clogging
- ✓ Wider surface contact area for faster removal

Visit: walter.com or contact your WALTER representative


FLEXCUT MILL SCALE™

NEW

Your days of problems removing mill scale are now over with the NEW Flexcut Mill Scale. No more glazing or clogging, just hassle free removal of mill scale, leaving a clean and even surface.

The thin layer of iron oxide covering the surface of hot rolled steel plates, sheets or profiles is known in the industry as mill scale or scale. It is difficult to remove as most abrasives will become glazed. The fine dust created from grinding cakes on between the abrasive grains and clogs the wheel.

With Walter's unique blend of highly refined, friable abrasives paired with its' one of a kind open diamond cut pattern, Flexcut Mill Scale will grind off mill scale rapidly and will self-dress to avoid clogging.

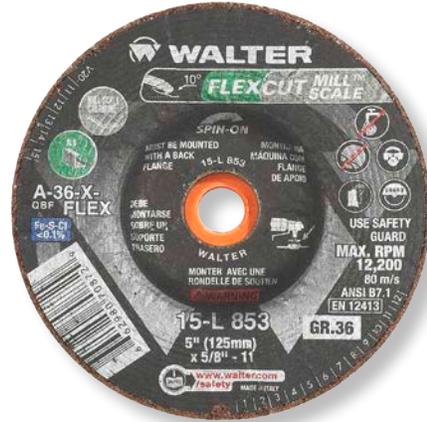

PRODUCT ORDERING INFORMATION

Dia.	Arbor	Order No.	Grade	Max RPM	Std. Pkg.	Std. Ctn.
4 1/2"	5/8"-11	15-L 843	A-36-FLEX	13,300	25	200
5"	5/8"-11	15-L 853	A-36-FLEX	12,200	25	200
6"	5/8"-11	15-L 863	A-36-FLEX	10,200	25	200
7"	7/8"	15-L 873	A-36-FLEX	8,600	25	100

- ▶ Unique blend of highly refined abrasives allows ultra quick removal without glazing or clogging
- ▶ Open diamond cut pattern discourages clogging
- ▶ Wider surface contact area for faster removal
- ▶ Extremely effective for heavily rusted plates, aluminum or galvanized metal
- ▶ Fe Free – guaranteed not to contaminate aluminum
- ▶ Cool cutting



Contact us today to meet with a representative
 1-888-JWALTER (1-888-592-5837)

WALTER.COM

All specifications and data are subject to change without notice. © Copyright J.Walter Company Ltd. 2012 All rights reserved. FLEXCUT MILL SCALE is a trademark of J.Walter Company Ltd. 98-E 118 (01-13)

Available at: